



Standard air hydraulic single ram and twin ram pit jack

- 2 individually or single controlled rams offer safe and balanced lifting
- Rapid and precise air hydraulic unit with high speed ram travel
- Simple modern design with control panel at ergonomical working height
- Frame height is adjusted and set to the customers individual specifications
- Fitted with leaf spring support bearings for easy glide transversing ram
- Comprehensive option range: cross beam, gearbox saddle, support bridge etc.

When ordering fill out spec form



Pit Jacks with Single or Twin Ram

PJ100-1 PJ100-2

PJ150-1 PJ150-2

PJ200-1 PJ200-2

Capacity 10 / 15 / 20 t

Options:



Crossbeam adapter

Capacity 15,0 tons, adjustable 125-750 mm, only for twin ram versions




Gearbox saddle

Capacity 1,0 tons, only for single ram versions

U-saddle adapter

Large model, capacity 10 tons, width = 100 mm (1 per cylinder needed)

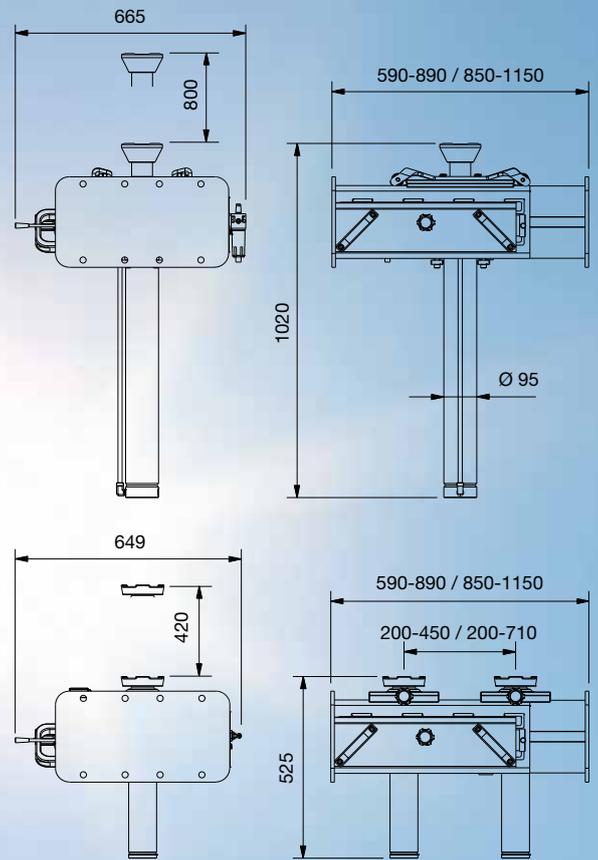

	PJ100-1	PJ150-1	PJ200-1	PJ100-2	PJ150-2	PJ200-2
Capacity	10 t	15 t	20 t	10 t	15 t	20 t
Stroke	800 mm	800 mm	800 mm	420 mm	420 mm	420 mm
Min. height	1020 mm	1020 mm	1020 mm	525 mm	525 mm	525 mm
Max. height	1820 mm	1820 mm	1820 mm	945 mm	945 mm	945 mm
Width range	590-1150	590-1150	590-1150	590-1150	590-1150	590-1150
Depth	665 mm	665 mm	665 mm	649 mm	649 mm	649 mm
Lifting points (distance)	n.a.	n.a.	n.a.	200-710 mm	200-710 mm	200-710mm
Air supply	8 - 12 bar					
Air consumption	350 l/min					
Weight	220 kg					

More information?

For more specific information about these products or one of the other quality products from Stertil Koni, please contact us for further assistance.

PitJacks 10-15-20t / Stertil is a registered trademark of Stertil B.V.
We reserve the right to make changes in specifications without notice and without making changes retroactive.



Stertil B.V.: P.O. Box 23 9288 ZG Kootstertille The Netherlands

Tel. +31(0)512 334444 Fax +31(0)512 334430 E-mail: vehiclelifts@stertil.nl Internet: www.stertil-koni.nl



A member of the Stertil Group