

# Mascot 40 H

Electro-hydraulic 2-post lift, 4.0 t capacity



## Application

- Repair and maintenance

## Description:

### Posts:

- Asymmetric post installation, vehicles can be positioned far to the rear, for better door-opening angle
- Very stable bent posts
- Without base frame, therefore free drive-in situation
- One power pack with low power consumption
- Carriage with optimized sliding block bearing for low friction
- Double door-stop mounted on carriage
- Electrically operated safety ratchet system, no expensive compressed air required
- Pushbutton control unit with parking button and alarm signal
- Adjustable limit switch for top stop and CE-stop, as well as upper protection switch rail
- Mechanic synchronization via steel cables
- Post is height adjustable during installation

### Arms:

- Universal lifting area from small passenger car up to VW T6 long wheel base with lifting pad type „F“
- Possibility of parallel parking of arms for easier and faster positioning of vehicles
- Arms can be opened more than 180° for better drive-in situation for lifts installed in 90° angle to the drive lane
- Low minimum height

### Standard colours:

- Carriage and arms: RAL 3020 – red
- Posts: RAL 7016 – grey

### Versions:

- Available with different voltages
- Universal arm set for different cars
- DT = double telescopic arms

### Optional extras:

- Set of expansion bolts
- Energy set with compressed air and socket-outlet
- Extra control unit for second post
- Large program of extra pads, depending on type of vehicle



Scan the QR-Code for detailed product information.

Further Information on [www.autopstenhoj.com](http://www.autopstenhoj.com)

**AUTOPSTENHOJ GmbH**

Sandkampstraße 90  
D-48432 Rheine  
☎ +49 5971 8602-02  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

**AUTOPSTENHOJ GmbH**





Barrit Langgade 188-190  
DK-7150 Barrit  
☎ +45 76 82 13 30  
✉ [info@autopstenhoj.com](mailto:info@autopstenhoj.com)

**Technical data**

Lifting capacity	4,000 kg
Lifting height	1,900 mm
Working height	1,990 – 2,013 mm
Lifting / lowering time	approx. 30 sec.
Motor	3.0 kW
Voltage	3x230 / 400 V-50 / 60Hz – 16 A

**Arm superstructure**

Lifting pad included in the delivery	F: 90 - 113 mm
Height of plug-in in superstructure	F: 57 mm
Min. height	F: 90 mm
Drive-through width	2,405 mm
Width between posts	2,740 mm
Total width - outer edges base plates	3,500 mm
Total height post	3,995 mm + 225 mm
Arm length front, min. - max.	F DT: 600 - 1,245 mm
Arm length rear, min. - max.	F DT: 750 - 1,445 mm

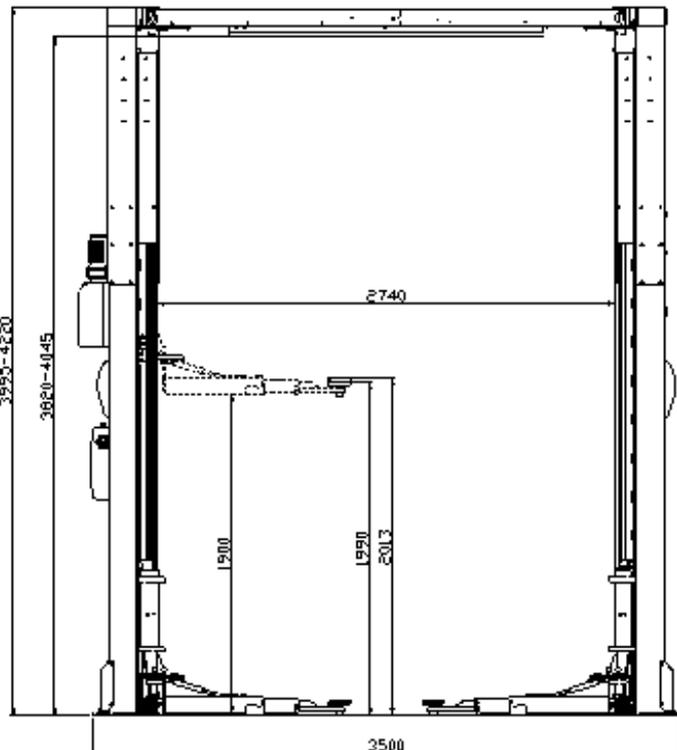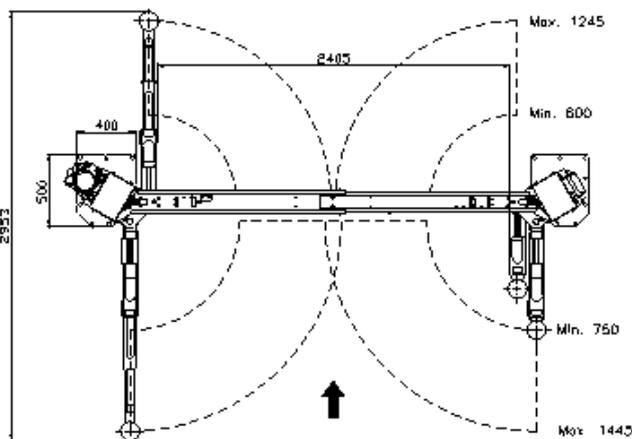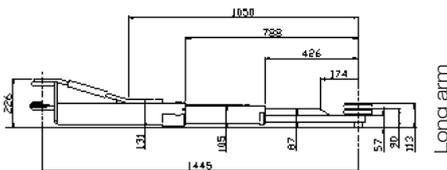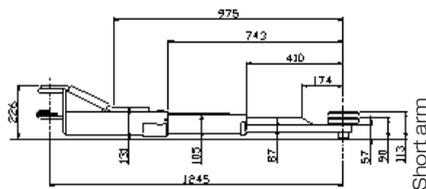

Double telescopic arms



Arm locking system and door stop protection



Pushbutton control with possibility to park in safety ratchets