


Testmaster RT40/RT60

Roller brake tester

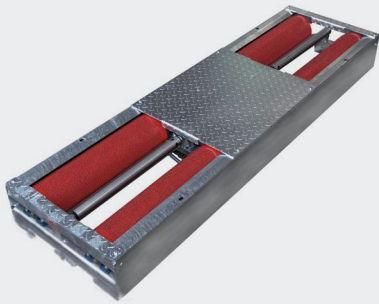

Application

- ☐ Check-in
- ☐ Repair and maintenance
- ☐ Test
- ☐ General inspection



Description:

- ☐ Galvanized, enclosed roller set
- ☐ Wear resistant 205 mm rollers with welded profile surface
- ☐ Track width RT40: from 800 to 2,200 mm (optional 2,800 mm) / Track width RT60: from 800 to 2,800 mm
- ☐ Height adjustment screws
- ☐ Wear resistant and modern electronic strain gauge measuring system
- ☐ 50 mm sensor rollers in stainless steel
- ☐ Prepared for retrofitting of weighing device
- ☐ Modular system, all roller sets can be extended to test lanes
- ☐ Compact electric / switchbox, prepared for upgrade
- ☐ Drive-over axle load 4,0 to (optional 5 t)
- ☐ Brake force 4,5 kN (optional 6 kN)
- ☐ Equipped as standard with drive-off system
- ☐ Manual / Automatic mode
- ☐ Delayed switch-on, start-up monitoring
- ☐ Test program for electronic parking brakes
- ☐ Lockable main switch
- ☐ With a large easily read analogue display with two 400 mm watches or with PC-connection kit and PC software

Versions:

- ☐ Galvanized roller set
- ☐ 205 mm rollers with welded surface profile
- ☐ Electrical / switch box with motor protection, control electronics, lockable main switch, 12 m pre-cabling

Optional extras:

- ☐ Test width RT40 800 - 2,800 mm
- ☐ Foundation frame
- ☐ Permanent formwork
- ☐ Plastic-coated rollers
- ☐ Pneumatic lowering/ lifting device
- ☐ Raising kit
- ☐ Suspension tester
- ☐ Tramming plate
- ☐ Rotation and measuring direction reversal
- ☐ Automatic four wheel recognition (patented)
- ☐ EDOS (Easy drive-out system - patented)
- ☐ Roller cover plate
- ☐ Remote control
- ☐ LED digital display
- ☐ Pedal force meter
- ☐ Weighing device
- ☐ PC connection & ASA live stream
- ☐ Minicomputer for ASA live stream
- ☐ PC software display, basic, test land and office
- ☐ Reinforced roller set

Special equipment on request!



Scan the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

autop Maschinenbau GmbH

Sandkampstraße 90
48432 Rheine | Germany

+49 5971 8602-02

+49 5971 8602-25

info@autopstenhoj.com

STENHØJ A/S

Barrit Langgade 188-190
DK-7150 Barrit

+45 76 82 13 30


+45 76 82 13 31

info@autopstenhoj.com

Technical data

Drive-over load	RT40	4,000 kg
	RT60	6,000 kg
Test speed		5 km/h
Drive motors	RT40	2 x 3 kW (option 2 x 4 kW)
	RT60	2 x 4 kW (option 2 x 5.5 kW)
Roller diameter		205 mm
Test width	RT40	800 – 2,200 mm (option 800 – 2,800mm)
	RT60	800 – 2,800 mm
Test load	RT40	at 50 % braking 2 t (option 2.6 t)
	RT60	at 50 % braking 2,6 t (option 4 t)
Fuse		3 x 20 A inert (3 – 4 kW motor) 3 x 25 A inert (5,5 kW motor)
Power supply		3 x 400 V, N, PE 50 Hz
Brake force	RT40	4.5 kN (option 6 kN)
	RT60	6 kN (option 10 kN)
Dimensions, analogue display box (W x H x D)		810 x 670 x 70 mm
Dimensions, roller set (L x W x H)	RT40	2,320 x 680 x 240 mm (800 – 2,200 mm)
	RT60	2,925 x 680 x 240 mm (800 – 2,800 mm)

Additional accessories at www.autopstenhoj.com

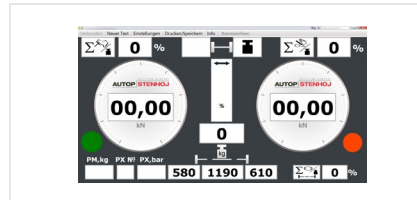

Cover for motorcycle test



Lowering and lifting device



Height adjustment screws

