

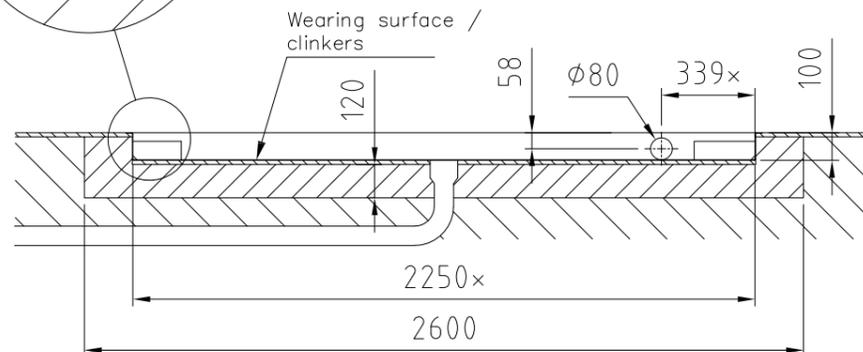



Foundation:
Minimum thickness without wearing surface:
min. 120mm.
Quality of concrete: C25/30 (EN206-1).


Power supply:
Power 230Vac/400Vac/3/50Hz
+N, +PE, 16A Class C (slow) 2,2kW

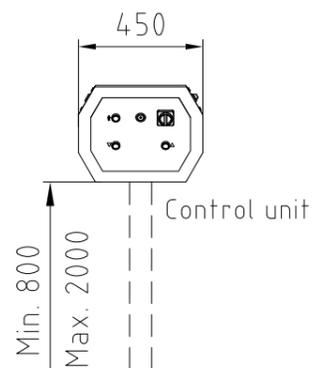

*) If alternative attachment is used the properties of this attachment must correspond to the bolt mentioned.

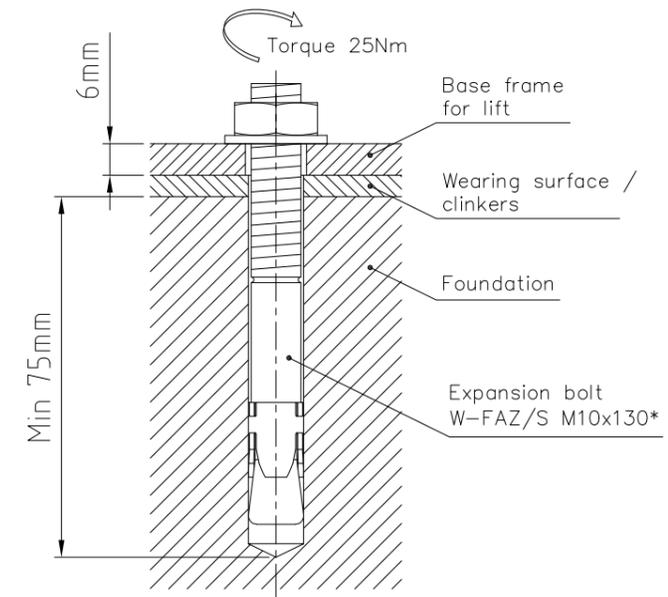

Recommended
drive-on
direction →

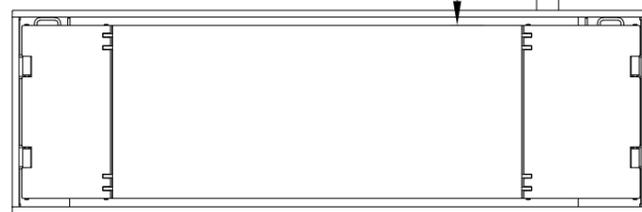

Note!
All dimensions marked (x) are recession dimensions
= internal dimensions on imbedding frames

Date: 040321

Sign. LJE

Scale: 1:25

No. T82338-GB

UPLIFTING COMPANY
AUTOP STENHOJ

Foundation plan
MagiX 35 DS II
(in-ground)
Rev. date: 071221